
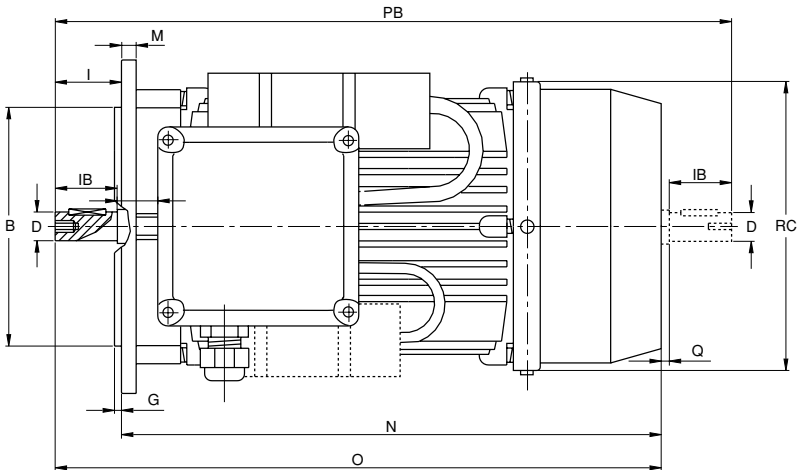


Dimensioni motori
monofase e monofase ad
alta coppia di spunto
serie M - MA - ME - MD -
MV - MC* - CD* - CV*

*Dimensions of single-
phase motors and single-
phase motors with high
locked rotor torque
series M - MA - ME - MD -
MV - MC* - CD* - CV**

Dimensions moteurs
monophasés et
monophasés à couple
élevé de décollage série
M - MA - ME - MD - MV -
MC* - CD* - CV*

*Abmessungen der Wechsel-
strommotoren und der
Wechselstrommotoren mit
hohem Anlauf-drehmoment
Serie M - MA - ME - MD - MV
- MC* - CD* - CV**

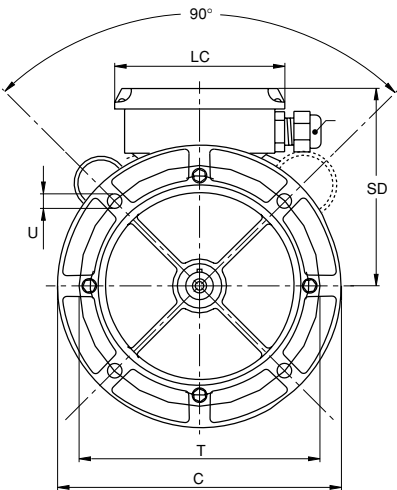

B5

Grandezza Size Grandeur Größe	Dimensioni / Dimensions / Dimensions / Abmessungen																	B5
	D	I	B	C	T	G	M	N	O	PG	RC	SD	U	PB	Q	LC	DC	IB
56	9	20	80	120	100	2,5	8,5	168,0	188,0	M16	110	108	7,0	211,0	3	93	15	20
63	11	23	95	140	115	2,5	10,0	190,5	213,5	M16	123	117	9,5	239,5	3	93	12	23
71	14	30	110	160	130	3,0	10,0	218,0	248,0	M16	137	124	9,5	281,0	3	93	23	30
80	19	40	130	200	165	3,0	11,0	242,0	282,0	M20	156	141	12,0	326,0	4	115	26	40
90S	24	50	130	200	165	3,5	10,0	255,0	305,0	M20	176	150	12,0	358,0	3	115	29	50
90L	24	50	130	200	165	3,5	10,0	280,0	330,0	M20	176	150	12,0	383,0	3	115	29	50
100	28	60	180	250	215	4,0	14,0	312,0	372,0	M20	194	159	14,5	437,0	5	115	33	60

** quote O/N - contattare ufficio
tecnico

** value O/N - get in touch with the
Technical Office

** Cote O/N - contacter de service
technique

** Wert O/N - anrufen des technische
Büro